




**CABOT**

creating what matters

## SLOW MIGRATION SLIP MASTERBATCH

# PLASADD® PE9020

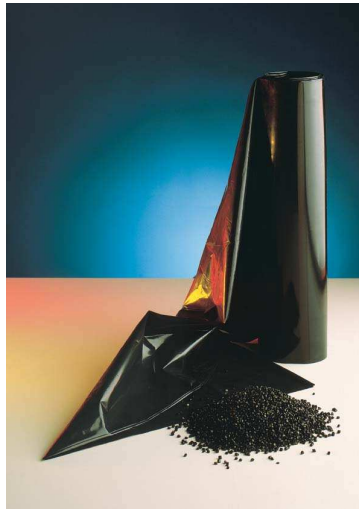

PLASADD® PE9020 is a polyethylene based masterbatch containing a slow migration slip agent designed for use in film applications.

Film surfaces can stick together for example by blocking or when there is a build-up of static electricity caused by friction during manufacture. To eliminate or reduce this problem, slip agents can be used which will allow film surfaces to slide over one another more easily. The slip additive migrates to the surface relatively slowly thus reducing potential problems during sealing and printing.

Slip agents are generally unsaturated amides, which are incompatible with the polymer and gradually migrate to the film surface, the rate depending on the molecular weight of the slip agent used and its incompatibility with the polymer. A lubricated film surface is thereby formed giving the required slip properties.

This product is suitable for use in a wide range of plastics that come into contact with food. For more details regarding the food contact compliance in various European countries, please refer to the relevant Food Contact Statement that you can obtain through your usual Cabot representative.

### METHOD OF ADDITION

PLASADD® PE9020 is designed for ease of dilution and homogeneous mixing and is therefore suitable for direct addition using automatic dosing units or by pre-blending.

### ADDITION RATE

The recommended addition level is 0.75% to 2% by weight of the masterbatch depending on the thickness of the product, the extrusion conditions and the final application. Should you need further information, please contact your local Cabot representative.



**Cabot Corporation**

[www.cabot-corp.com/plastics](http://www.cabot-corp.com/plastics)

**PHYSICAL PROPERTIES**

PROPERTY	VALUE	TEST METHOD (*)
Carrier	LDPE	
Additives	8 % erucamide	
Colour	PE9020 pellets have a translucent appearance	
Compatibility	LDPE, LLDPE, HDPE, PP, EVA and other ethylene copolymers	
Density @ 23°C	910 kg/m3	CTM E023
MFI 2.16kg/190°C	16 g/10 min	CTM E005 (ISO 1133)

(\*) Tests are performed according to Cabot Test Methods (CTM) based on international Standards

Quoted test results should not be used for specification purposes but are typical test values intended for guidance only.

**PACKAGING**

PLASADD® PE9020 is supplied in regular pellet form packed in 25 kg bags. It should be stored in a cool, dry place.

Recommended storage life: up to 3 months provided it is stored as directed.

28-06-2007

This information is provided as a convenience and for informational purposes only. No guarantee or warranty as to this information, or any product to which it relates, is given or implied. This information may contain inaccuracies, errors or omissions and CABOT DISCLAIMS ALL WARRANTIES EXPRESS OR IMPLIED, INCLUDING MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE AS TO (i) SUCH INFORMATION, (ii) ANY PRODUCT OR (iii) INTELLECTUAL PROPERTY INFRINGEMENT. In no event is Cabot responsible for, and Cabot does not accept and hereby disclaims liability for, any damages whatsoever in connection with the use of or reliance on this information or any product to which it relates.

<b>HEAD OFFICE</b> Cabot SCCC Interleuvenlaan 15 I B - 3001 Leuven - Belgium Tel : +32 16 39 24 00 Fax : +32 16 39 24 44	<b>Cabot Plastics Belgium S.A.</b> Rue Prevochamps 78 B - 4860 Pepinster - Belgium Tel: +32 87 39 27 11 Fax: +32 87 46 98 69	<b>Cabot Plastics Deutschland</b> Tel: (0800) 182 40 86 Fax: (0800) 182 40 87 c/o Cabot Plastics Belgium S.A. (see address on the left)	<b>中国</b> 卡博特(中国)投资有限公司 中国上海吴泾双柏路558号 邮编:201108 电话:+86 21 6434-7766 传真:+86 21 6434-5532
<b>SALES OFFICES</b> Cabot Plastics Hong Kong Ltd 18 Dai Kwai Street Tai Po Industrial Estate / NT Hong Kong SAR - PRC Tel: +852 2666 2666 Fax: +852 2666 0807	<b>Cabot Latin America Division</b> Rua do Paraíso, 148 – 5th floor Paraíso CEP 04103-000 São Paulo SP - Brazil Tel: +55 11 21 44 64 00 Fax: +55 11 32 53 00 51 Tel.: (0800) 195 959 (Customer Service)	<b>Cabot Italiana S.p.A</b> Zona Industriale, 4 I - 38055 Grigno (TN) - Italia Tel: +39 0461 775 211 Fax: +39 0461 765 146	

PLASBLAK®, PLASWITE®, PLASGREY®, PLASADD®, CABELECC® and CABOT® are registered trademarks of Cabot Corporation  
© Cabot Corporation, MA, U.S.A. All rights reserved. 2010