


BLACK POLYETHYLENE MASTERBATCH FOR  
FILM, SHEET EXTRUSION, GEOMEMBRANES  
AND MOULDING APPLICATIONS



## PLASBLAK® PE2272

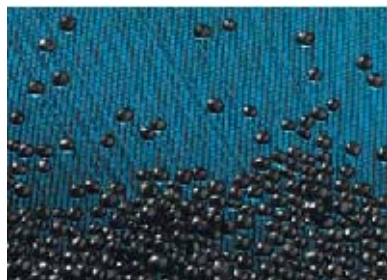

PLASBLAK® PE2272 is designed for general purpose film and geomembranes, sheet extrusion and moulding applications.

### **METHOD OF ADDITION**

PLASBLAK® PE2272 is designed for ease of dilution and homogeneous mixing and is therefore suitable for direct addition using automatic dosing units or by pre-blending.

### **ADDITION RATE**

The amount of masterbatch added depends on the performance requirements of the final application and the carbon black content specified in the finished product. Typical addition rates vary from 2% to 5% masterbatch (8% to 25% in mulch film).



**Cabot Corporation**  
[www.cabot-corp.com/plastics](http://www.cabot-corp.com/plastics)

PLASBLAK® PE2272

BLACK POLYETHYLENE  
MASTERBATCH FOR FILM, SHEET  
EXTRUSION, GEOMEMBRANES AND  
MOULDING APPLICATIONS



### PHYSICAL PROPERTIES

PROPERTY	VALUE	TEST METHOD (*)
Carrier	LDPE	
Pigment	50% SRF carbon black	
Compatibility	LDPE, LLDPE, HDPE, PP, ethylene copolymers	
Density @ 23°C	1230 kg/m <sup>3</sup>	CTM E023
MFI 10 kg/190°C	13 g/10 min	CTM E005 (ISO 1133)

(\*) Tests are performed according to Cabot Test Methods (CTM) based on international Standards

Quoted test results should not be used for specification purposes but are typical test values intended for guidance only.

### PACKAGING

PLASBLAK® PE2272 is supplied in regular pellet form packed in 25 kg bags. It should be stored in a dry place.

PLASBLAK® PE2272 can also be supplied in micropulverized form under code PM2272.

Recommended storage life: up to 1 year provided it is stored as directed.

This information is provided as a convenience and for informational purposes only. No guarantee or warranty as to this information, or any product to which it relates, is given or implied. This information may contain inaccuracies, errors or omissions and CABOT DISCLAIMS ALL WARRANTIES EXPRESS OR IMPLIED, INCLUDING MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE AS TO (i) SUCH INFORMATION, (ii) ANY PRODUCT OR (iii) INTELLECTUAL PROPERTY INFRINGEMENT. In no event is Cabot responsible for, and Cabot does not accept and hereby disclaims liability for, any damages whatsoever in connection with the use of or reliance on this information or any product to which it relates.

HEAD OFFICE  
Cabot SCCC  
Interleuvenlaan 15 I  
B - 3001 Leuven - Belgium  
Tel : +32 16 39 24 00  
Fax : +32 16 39 24 44  
SALES OFFICES  
Cabot Plastics Ltd  
Gate Street  
Dukinfield SK16 4RU - England  
Tel: +44 161 934 4500  
Fax: +44 161 934 4501

Cabot Plastics Belgium S.A.  
Rue Prevochamps 78  
B - 4860 Pepinster - Belgium  
Tel: +32 87 39 27 11  
Fax: +32 87 46 98 69  
Cabot Latin America Division  
Rua do Paraíso, 148 – 5th floor  
Paraíso CEP 04103-000 São Paulo SP -  
Brazil  
Tel: +55 11 21 44 64 00  
Fax: +55 11 32 53 00 51  
Tel.: (0800) 195 959 (Customer Service)

Cabot Plastics Deutschland  
Tel: (0800) 182 40 86  
Fax: (0800) 182 40 87  
c/o Cabot Plastics Belgium S.A.  
(see address above)

Cabot Italiana S.p.A  
Zona Industriale, 4  
I - 38055 Grigno (TN) - Italia  
Tel: +39 0461 775 211  
Fax: +39 0461 765 146

Cabot Plastics Hong Kong Ltd  
18 Dai Kwai Street  
Tai Po Industrial Estate / NT  
Hong Kong SAR - PRC  
Tel: +852 2666 2666  
Fax: +852 2666 0807  
Cabot (China) Limited  
558 Shuangbai Road  
Shanghai, China 201108  
Tel: +86 21 5175 8800  
Fax: +86 21 6434 5532

PLASBLAK®, PLASWITE®, PLASGREY®, PLASADD®, CABELECC® and CABOT® are trademarks of Cabot Corporation  
© Cabot Corporation, MA, U.S.A. All rights reserved. 2007