

UTILITY BLACK MASTERBATCH FOR FILM,
EXTRUSION AND COMPOUNDING
APPLICATIONS



PLASBLAK® PE2648



PLASBLAK® PE2648 is a utility black masterbatch offering the following excellent performance benefits:

- high level of opacity (see graph)
- high tinting strength
- excellent gloss levels

PLASBLAK® PE2648 is designed to provide good pigmentation in film applications. Typical end products are garbage bags, consumer packaging, builders and agricultural film. This product is also recommended for applications requiring the pigmentation of recycled material.

This product is suitable for use in a wide range of plastics that come into contact with food . For more details regarding the food contact compliance in various European countries, please refer to the relevant Food Contact Statement that you can obtain through your usual Cabot representative.

METHOD OF ADDITION

PLASBLAK® PE2648 is designed for ease of dilution and homogeneous mixing and is therefore suitable for direct addition using automatic dosing units or by pre-blending.

ADDITION RATE

The amount of masterbatch added depends on the performance requirements of the final application. Typical addition rates vary from 2% to 4% masterbatch.



Cabot Corporation

www.cabot-corp.com/plastics

PLASBLAK® PE2648

UTILITY BLACK MASTERBATCH FOR
FILM, EXTRUSION AND COMPOUNDING
APPLICATIONS




PHYSICAL PROPERTIES

PROPERTY	VALUE	TEST METHOD (*)
Carrier	polyethylene	
Pigment	carbon black	
Compatibility	LDPE, LLDPE, HDPE, PP, ethylene copolymers	
Density @ 23°C	1630 kg/m ³	CTM E023
MFI 10 kg/190°C	11 g/10 min	CTM E005 (ISO 1133)

(*) Tests are performed according to Cabot Test Methods (CTM) based on international Standards. Quoted test results should not be used for specification purposes but are typical test values intended for guidance only.

COMPARISON OF OPACIFYING PROPERTIES

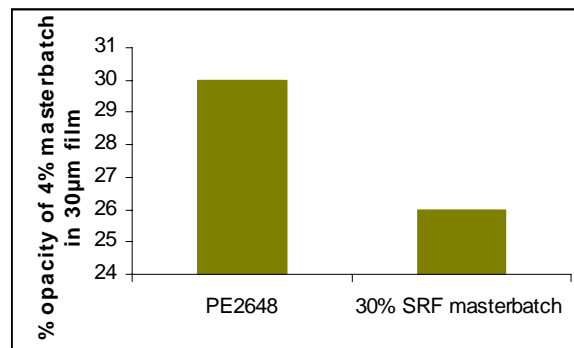

It has been designed to offer a superior level of performance compared to other utility black masterbatches.

PACKAGING

PLASBLAK® PE2648 is supplied in regular pellet form packed in 25 kg bags. It should be stored in a dry place. Recommended storage life: up to 1 year provided it is stored as directed.

This information is provided as a convenience and for informational purposes only. No guarantee or warranty as to this information, or any product to which it relates, is given or implied. This information may contain inaccuracies, errors or omissions and CABOT DISCLAIMS ALL WARRANTIES EXPRESS OR IMPLIED, INCLUDING MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE AS TO (i) SUCH INFORMATION, (ii) ANY PRODUCT OR (iii) INTELLECTUAL PROPERTY INFRINGEMENT. In no event is Cabot responsible for, and Cabot does not accept and hereby disclaims liability for, any damages whatsoever in connection with the use of or reliance on this information or any product to which it relates.

HEAD OFFICE
Cabot SCCC
Interleuvenlaan 15 I
B - 3001 Leuven - Belgium
Tel : +32 16 39 24 00
Fax : +32 16 39 24 44
SALES OFFICES
Cabot Plastics Ltd
Gate Street
Dukinfield SK16 4RU - England
Tel: +44 161 934 4500
Fax: +44 161 934 4501

Cabot Plastics Belgium S.A.
Rue Prevochamps 78
B - 4860 Pepinster - Belgium
Tel: +32 87 39 27 11
Fax: +32 87 46 98 69

Cabot Latin America Division
Rua do Paraíso, 148 – 5th floor
Paraíso CEP 04103-000 São Paulo SP -
Brazil
Tel: +55 11 21 44 64 00
Fax: +55 11 32 53 00 51
Tel.: (0800) 195 959 (Customer Service)

Cabot Plastics Deutschland
Tel: (0800) 182 40 86
Fax: (0800) 182 40 87
c/o Cabot Plastics Belgium S.A.
(see address above)

Cabot Italiana S.p.A
Zona Industriale, 4
I - 38055 Grigno (TN) - Italia
Tel: +39 0461 775 211
Fax: +39 0461 765 146

Cabot Plastics Hong Kong Ltd
18 Dai Kwai Street
Tai Po Industrial Estate / NT
Hong Kong SAR - PRC
Tel: +852 2666 2666
Fax: +852 2666 0807
Cabot (China) Limited
558 Shuangbai Road
Shanghai, China 201108
Tel: +86 21 5175 8800
Fax: +86 21 6434 5532